



***STELLAR SHUTTLE***  
***MODEL 84-9-8 G***  
***ASSEMBLY***  
***AND***  
***INSTALLATION***  
***MANUAL***




# Table of Contents

|   |    |
|---|----|
| Hydraulic Hook Lift Specifications..... | 2  |
| Base Assembly .....                     | 3  |
| Dump Assembly .....                     | 4  |
| Secondary Assembly.....                 | 5  |
| Tilt Assembly .....                     | 6  |
| Installation Instructions.....          | 7  |
| Mounting Kit .....                      | 8  |
| Safety Valve Installation.....          | 9  |
| Rotary Valve Assembly .....             | 10 |
| 7 Gallon Tank Assembly.....             | 11 |
| Hydraulic Assembly .....                | 12 |
| Controller Assembly.....                | 13 |
| Mounting Kit, 7 Gallon.....             | 14 |
| Miscellaneous Parts .....               | 14 |
| Subframe .....                          | 15 |
| Warranty.....                           | 16 |

# Hydraulic Hook Lift Specifications


|  |  |
|--|--|
| <b>Lifting Capacity:</b>               | 8,800 pounds gross weight evenly distributed in, or on, body.  |
| <b>Container Length:</b>               | 10-foot through 13-foot from front A-frame to rear of skid rails. Longer bodies may be accommodated if full dump angle is not required (may require special body-mounted or extendable truck-mounted bumper to meet the Office of Motor Carrier Safety (OMCS) Rear End Protection regulation 393.86)   |
| <b>Maximum Dump Angle:</b>             | 58°  |
| <b>Operating Pressure:</b>             | 4200 PSI maximum   |
| <b>Weight of Loader:</b>               | Loader weight not to exceed 1,500 pounds   |
| <b>Height of Loader:</b>               | Loader height not to exceed 4" as measured from top of truck frame to top of loader rollers  |
| <b>Hook Height:</b>                    | 36.25-inches from bottom of skid rails to centerline of hook bar. Loader must be able to pick up 10-inches below grade when mounted on a truck with 36" frame height.  |
| <b>Hydraulic Pump:</b>                 | Direct-coupled high-pressure gear pump.  |
| <b>Hydraulic Control Valve:</b>        | Stack-type valve mounted directed onto the oil reservoir.  |
| <b>Controls:</b>                       | Dual manual levers with sealed cable actuators mounted in the truck cab to allow full feathering of all loader functions.  |
| <b>Tilting Hook Assembly:</b>          | Loader must have pivoting type front tilt section (jib) to provide a low degree loading/unloading angle. Hook to include automatic mechanical safety latch, which disengages only when the container/body is in proper position to be picked up or dropped off.  |
| <b>Tilt Cylinder:</b>                  | Single 3-inch bore with 1.5-inch diameter rod cylinder. Cylinder must be double acting and include dual integral pilot-operated counterbalance valves to prevent cylinder collapse in case of hose failure.  |
| <b>Tilt Section Operation:</b>         | Loader must include a hydraulic lock-out device to prevent operation of the tilt section while loader is in the dumping mode.  |
| <b>Lift/Dump Cylinder:</b>             | Single 4-inch bore with 2-inch diameter rod cylinder. Cylinder must be double acting and include dual integral pilot-operated counterbalance valves to prevent cylinder collapse in case of hose failure.  |
| <b>Dump/Tilt Interlock:</b>            | Dumping must be accomplished through a rear pivot. Tilt and lift sections must lock into a rigid full length 25" wide frame with front saddles to provide support for the container while in the dump mode. These sections form this frame without the use of mechanical latches, which rely on gravity, springs, or container/body mounted latches. |
| <b>Rear Body Hold-Downs:</b>           | Dual fixed-position hold-down devices mounted to the dump frame to secure the body to the loader through all ranges of the dump mode. This must be accomplished without the use of steel springs and/or hydraulic/air cylinders.   |
| <b>Rear Dump Hinge Pin:</b>            | 2-inch diameter hardened, chrome-plated steel minimum  |
| <b>Pins &amp; Bushings</b>             | All pins to be hardened chrome steel. All bushings to be of the permanently lubricated variety. No grease zerks allowed.   |
| <b>Hoses &amp; Hydraulic Fittings:</b> | All hoses and fittings are to be SAE: metrics not allowed. O-ring face seal fittings to be utilized wherever possible.   |
| <b>Origin of Manufacture:</b>          | Loader to be designed and manufactured in the United States of America.  |

## Base Assembly

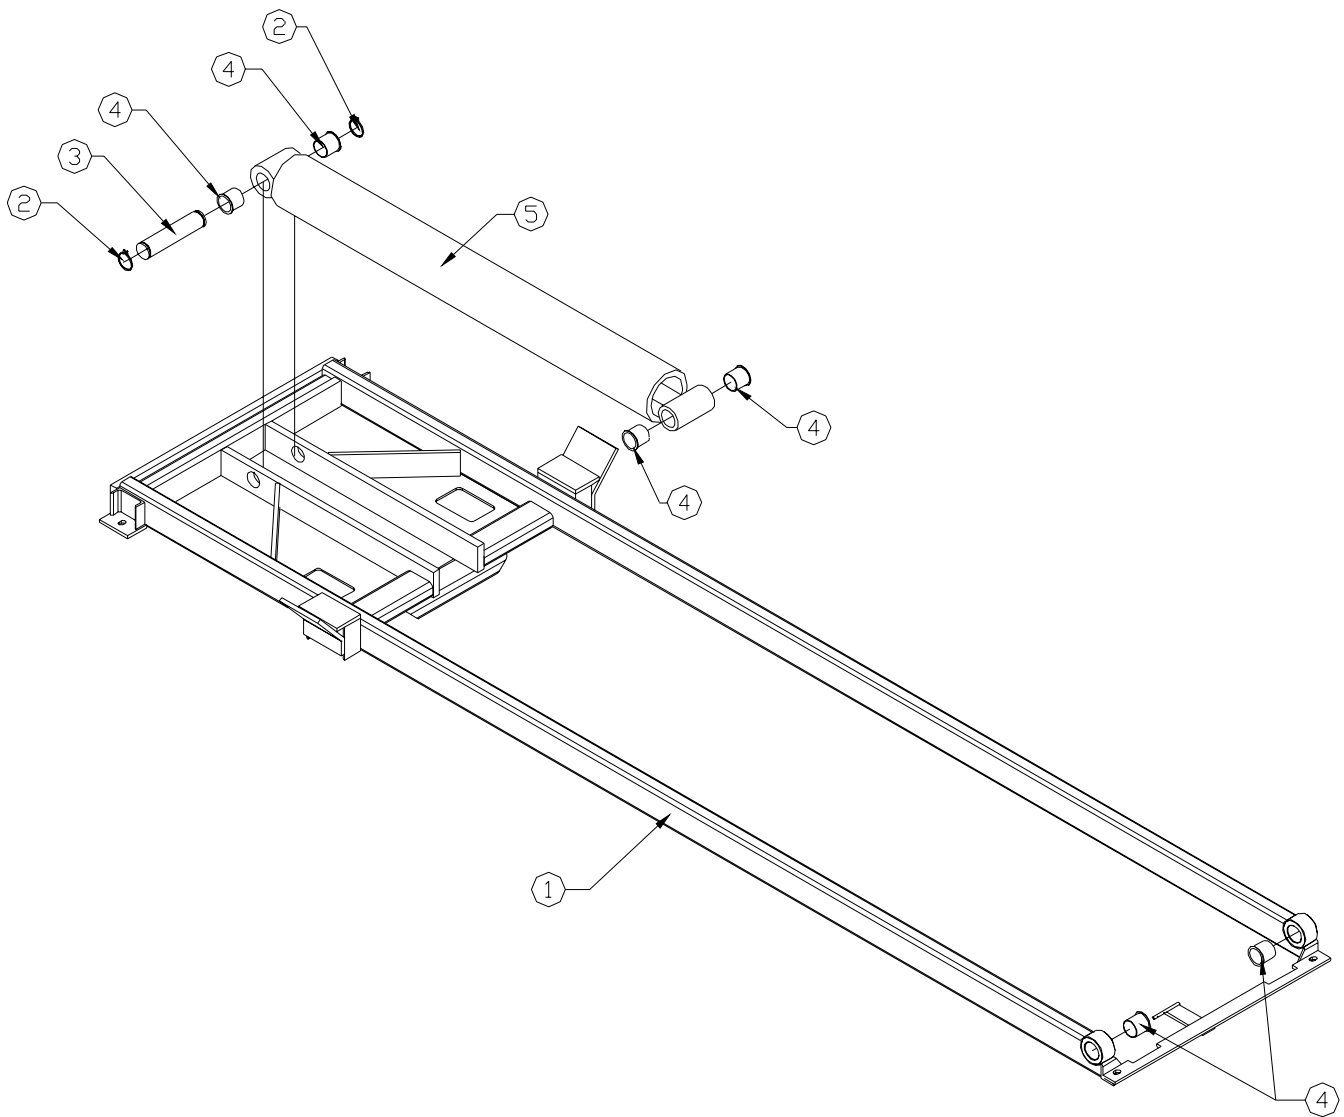


| ITEM | P/N  | DESCRIPTION          | QTY |
|------|------|----------------------|-----|
| 1    | 7955 | Base Weldment        | 1   |
| 2    | 0108 | Snap Ring, 2.00      | 2   |
| 3    | 0065 | Pin, 2.00x9.00       | 1   |
| 4    | 0066 | Bushing, GSI-3235-32 | 6   |
| 5    | 0315 | Cylinder, 4.00x40.00 | 1   |

# Dump Assembly

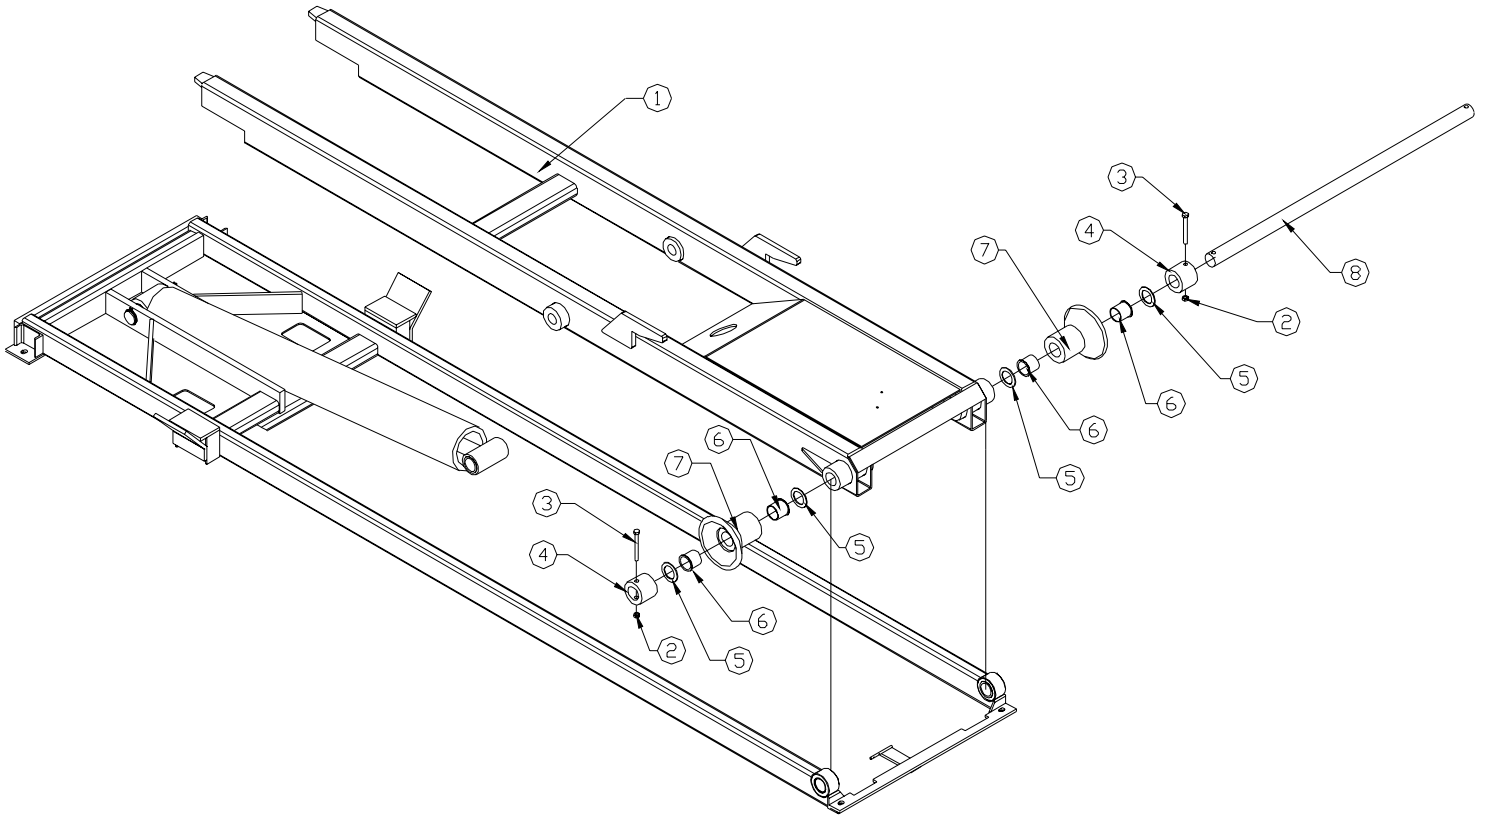


| ITEM | P/N  | DESCRIPTION            | QTY | ITEM | P/N  | DESCRIPTION             | QTY |
|------|------|------------------------|-----|------|------|-------------------------|-----|
| 1    | 7952 | Dump Weldment          | 1   | 5    | 1546 | Thrust Washer, 2.01 Dia | 4   |
| 2    | 0360 | Nut, .50-13 Nyloc      | 2   | 6    | 0066 | Bushing, GSI-3235-32    | 4   |
| 3    | 0507 | Cap Screw, .50-13x4.50 | 2   | 7    | 0013 | Roller, 2.19            | 2   |
| 4    | 0015 | Collar, Roller         | 2   | 8    | 0060 | Pin, 2.00x49.88         | 1   |

## Secondary Assembly

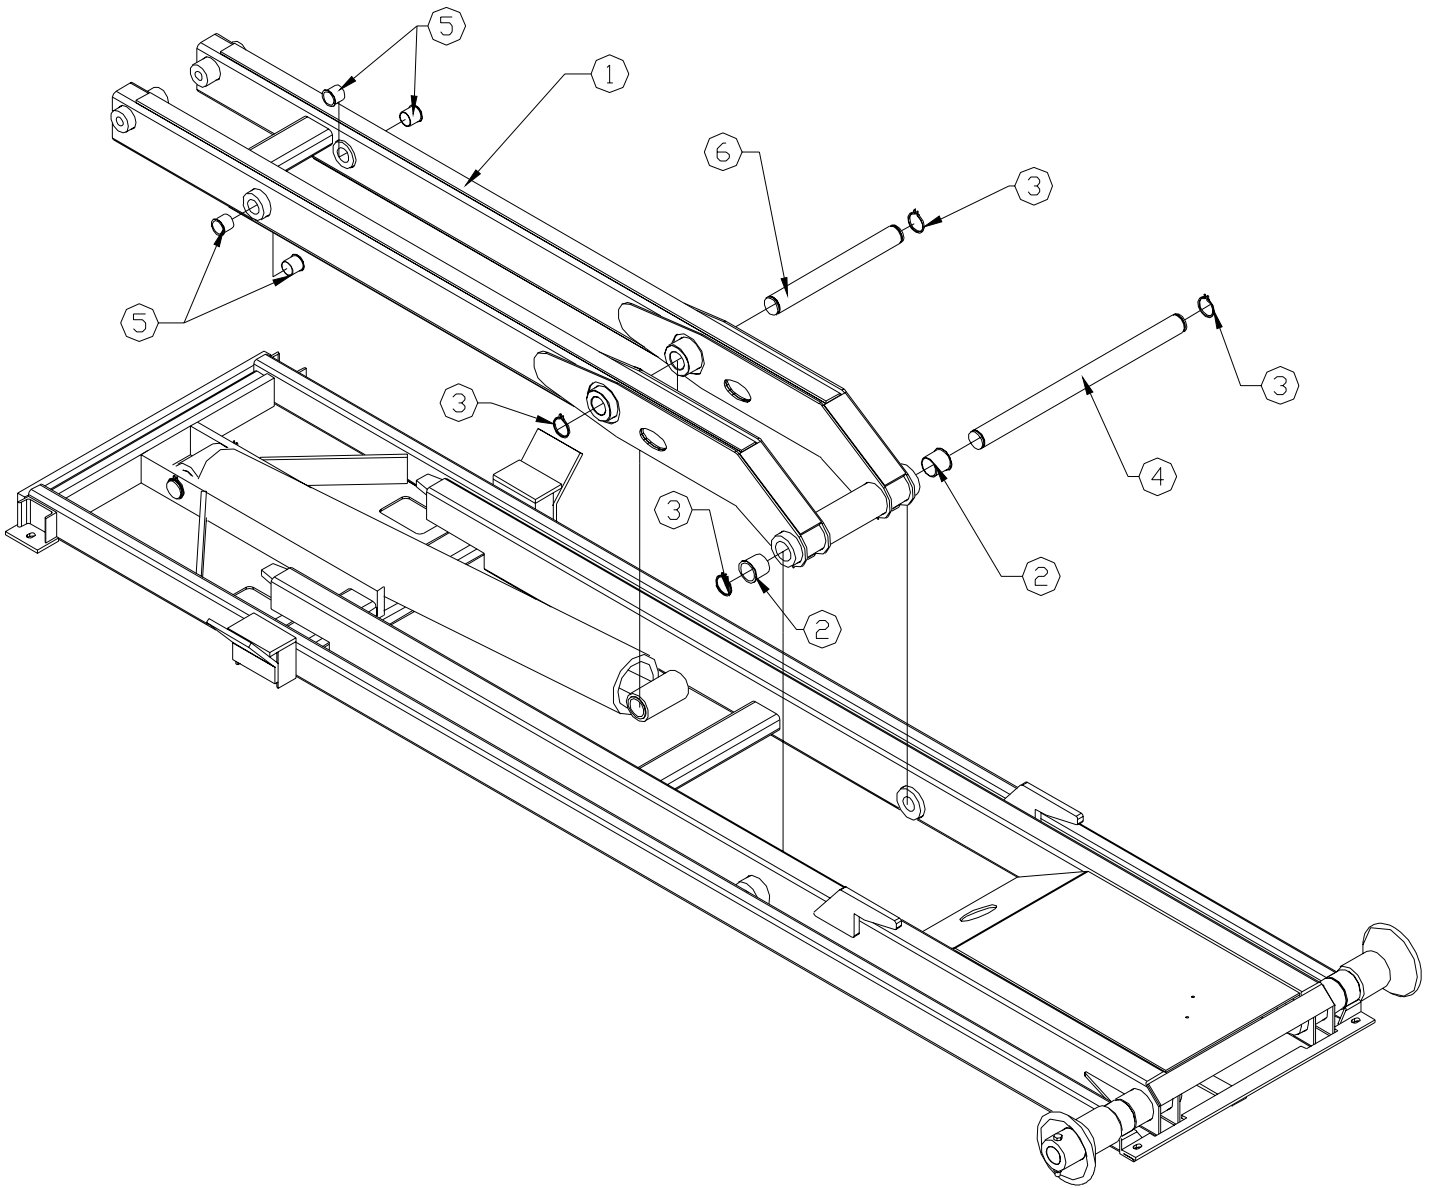

| ITEM | P/N  | DESCRIPTION         | QTY |
|------|------|---------------------|-----|
| 1    | 0286 | Secondary Weldment  | 1   |
| 2    | 0066 | Bushing, GF-3235-32 | 2   |
| 3    | 0108 | Snap Ring, 2.00     | 4   |
| 4    | 0244 | Pin, 2.00x29.00     | 1   |
| 5    | 0067 | Bushing, GF-2426-24 | 4   |
| 6    | 0061 | Pin, 2.00x17.88     | 1   |

# Tilt Assembly

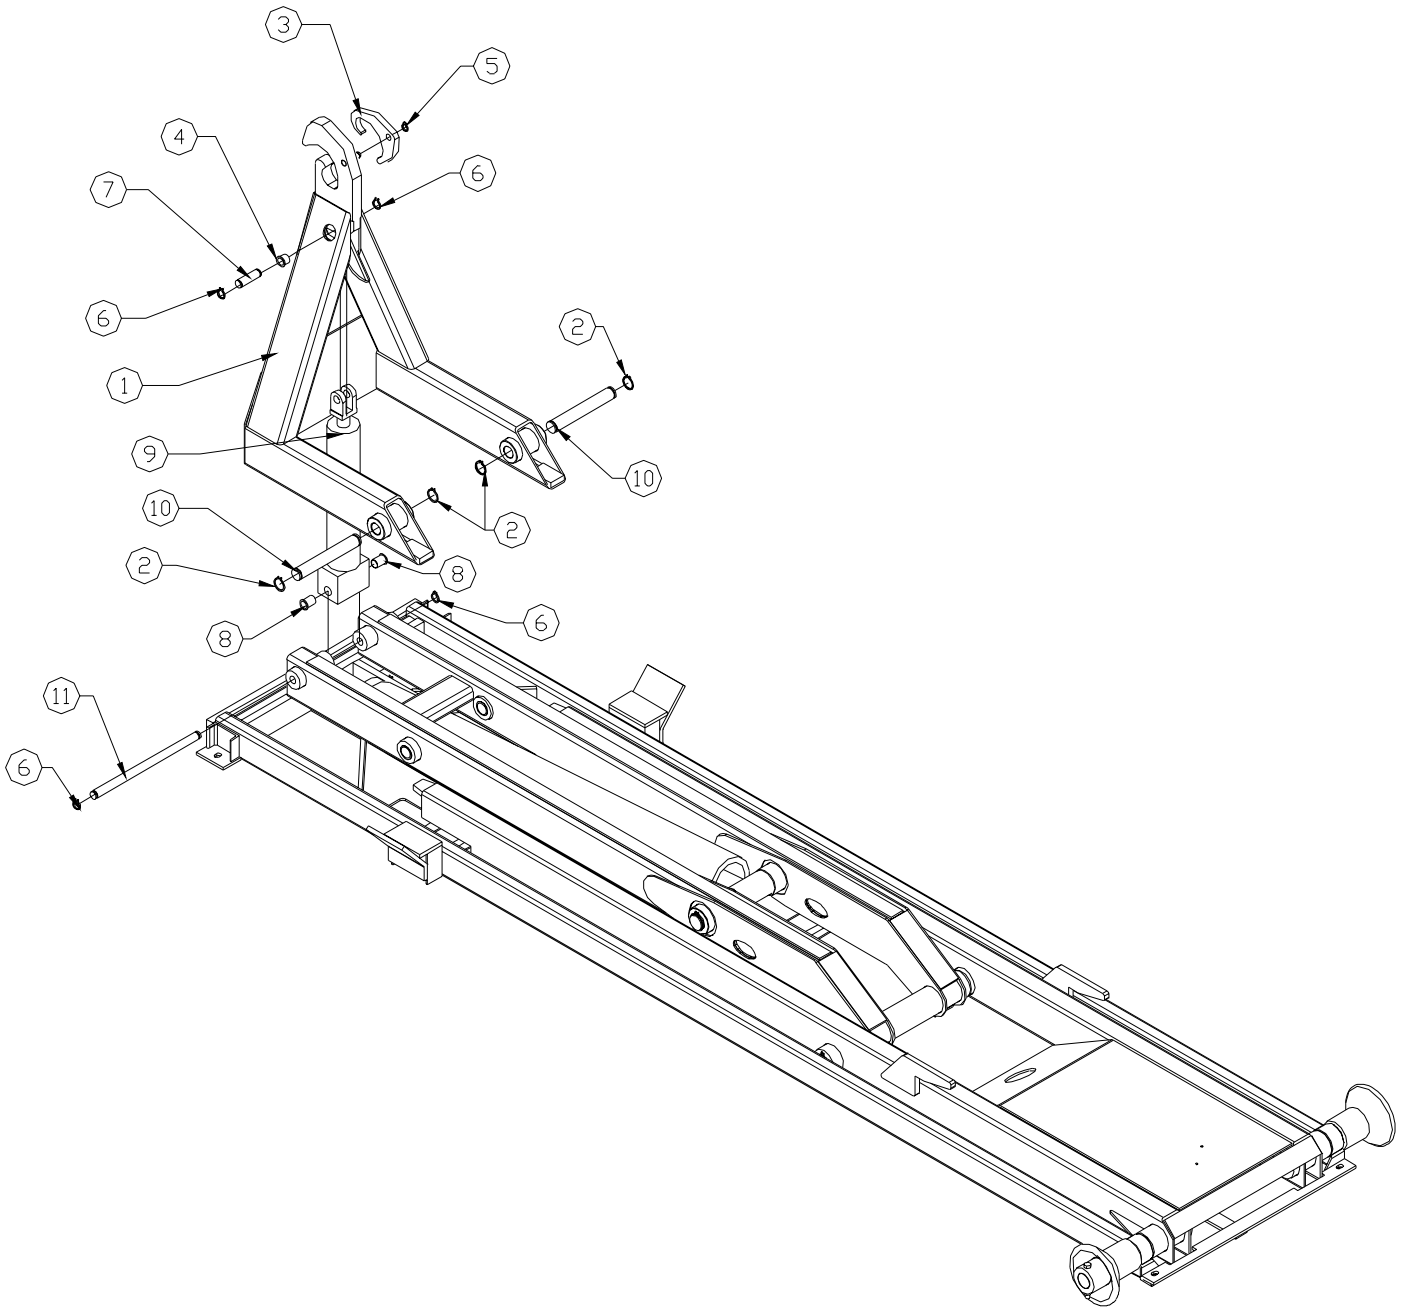

| ITEM | P/N  | DESCRIPTION          | QTY | ITEM | P/N  | DESCRIPTION          | QTY |
|------|------|----------------------|-----|------|------|----------------------|-----|
| 1    | 0011 | Tilt Weldment        | 1   | 7    | 0064 | Pin, 1.00x3.38       | 1   |
| 2    | 0246 | Snap Ring, 1.50      | 4   | 8    | 0068 | Bushing, GSI-1618-24 | 2   |
| 3    | 0295 | Latch, 12,000#       | 1   | 9    | 0058 | Cylinder, 3.00x14.50 | 1   |
| 4    | 0069 | Bushing, GSI-1618-16 | 1   | 10   | 0245 | Pin, 1.50x10.50      | 2   |
| 5    | 0298 | Snap Ring, 0.75      | 1   | 11   | 0063 | Pin, 1.00x17.63      | 1   |
| 6    | 0110 | Snap Ring, 1.00      | 4   |      |      |                      |     |

# **INSTALLATION INSTRUCTIONS**

## **READ ALL INSTRUCTIONS BEFORE PROCEEDING**

MOUNT PTO AND PUMP

MOUNT RESERVOIR VALVE COMBO TO TRUCK FRAME

CONNECT SUCTION AND PRESSURE TO TANK, VALVE BANK, AND PUMP

FILL OIL RESERVOIR TO 3" OF THE TOP (DEXTRON II IS RECOMMENDED)

INSTALL CONTROLLERS AND CABLES IN CAB

SET SHUTTLE ON THE TRUCK SO THAT ITS FRONT PLATE IS AT LEAST 2" BEHIND THE CAB

SQUARE THE SHUTTLE ON THE TRUCK FRAME

DRILL 2-11/16" DIAMETER HOLES THROUGH THE TRUCK FRAME AT THE BACK USING THE LOADER'S HOLES AS A GUIDE

USING 5/8" BOLTS, WASHERS, NUTS, AND TIE DOWN SPACER BOLT THE REAR OF THE LOADER TO THE TRUCK FRAME

SHORTEN THE TRUCK FRAME TO ABOUT 2" FROM THE REAR TO THE LOADER

USING 5/8" BOLTS, WASHERS, AND NUTS ATTACH THE 4 MOUNTING CHANNELS TO THE 4 ANGLES AS SHOWN IN THE INSTALLATION DRAWING ON PAGE 8

USING THE MOUNTING CHANNELS AS A GUIDE DRILL (4) 11/16" HOLES THROUGH THE TRUCK FRAME.

USING 5/8" BOLTS, WASHERS, AND NUTS SECURE ALL TIE DOWNS TO THE TRUCK FRAME AND THE LOADER

WELD MOUNTING ANGLE TO LOADER BASE


CONNECT HOSES TO VALVE BANK AS INDICATED IN HYDRAULIC ASSEMBLY

SET THE RELIEF VALVE TO 4200 PSI

OPERATE THE LOADER TO ELIMINATE AIR FROM THE SYSTEM

CHECK THE OIL LEVEL AND ADD OIL IF REQUIRED

# Mounting Kit

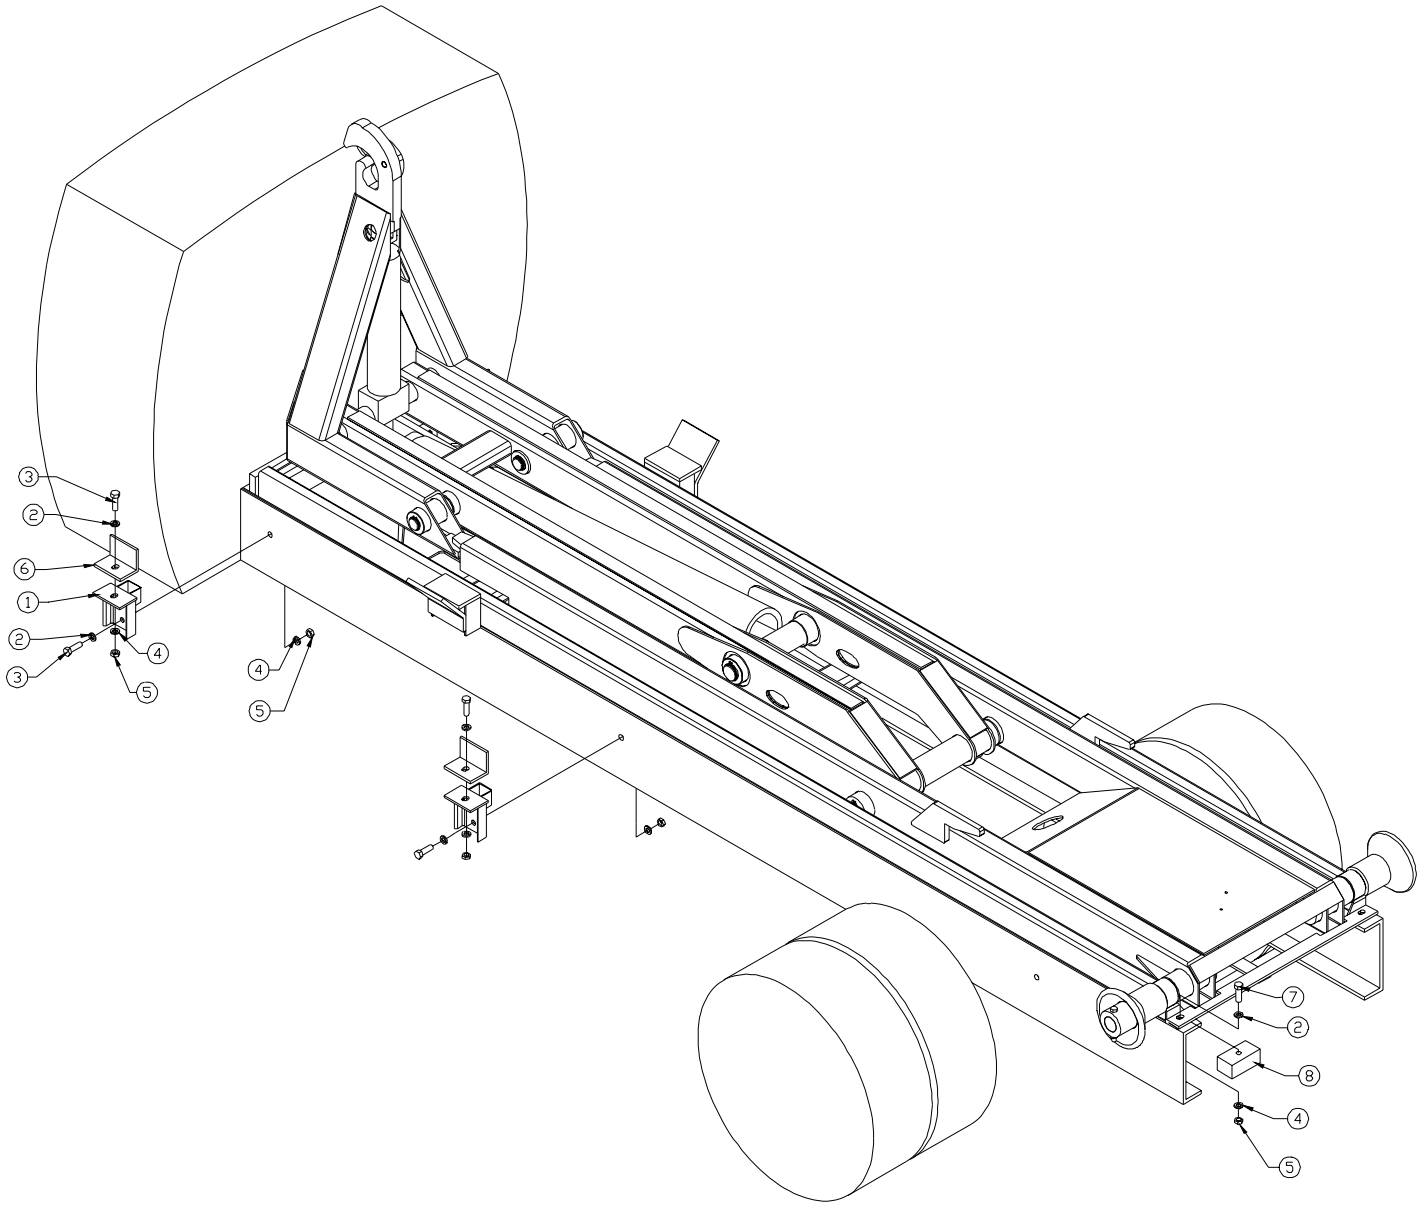


| ITEM | P/N  | DESCRIPTION             | QTY | ITEM | P/N   | DESCRIPTION             | QTY |
|------|------|-------------------------|-----|------|-------|-------------------------|-----|
| 1    | 0639 | Channel, Tie Down       | 4   | 5    | 0357  | Nut, 0.63-11            | 10  |
| 2    | 0358 | Washer, 0.63 SAE        | 10  | 6    | D0143 | Channel, Tie Down       | 4   |
| 3    | 0399 | Cap Screw, 0.63-11x2.00 | 8   | 7    | 0512  | Cap Screw, 0.63-11x3.75 | 2   |
| 4    | 0526 | Washer, 0.63 Lock       | 10  | 8    | 0640  | Spacer, Tie Down        | 2   |

## Safety Valve Installation


Incorporated into the standard Stellar Hooklift is a safety valve designed to protect the dump section tabs from being damaged by the tilt section.

It is important to locate this valve properly for safe operation of the Stellar Hooklift.

This cartridge is located in the main valve stack and **MUST** be placed off of the tilt cylinder retract port. The following illustrations show a standard (driver side) installation and an optional (passenger side) installation. Passenger side installations are common when mounting to cab-over chassis. All valve stacks are shipped for standard (driver side) installations. The safety valve must be moved to the tilt cylinder retract port for all non-standard installations. This valve will be switched with a load check plug when being moved to an alternate position. A poppet and spring are located behind the safety valve and load check plugs. Care should be taken not to lose these parts when modifying.

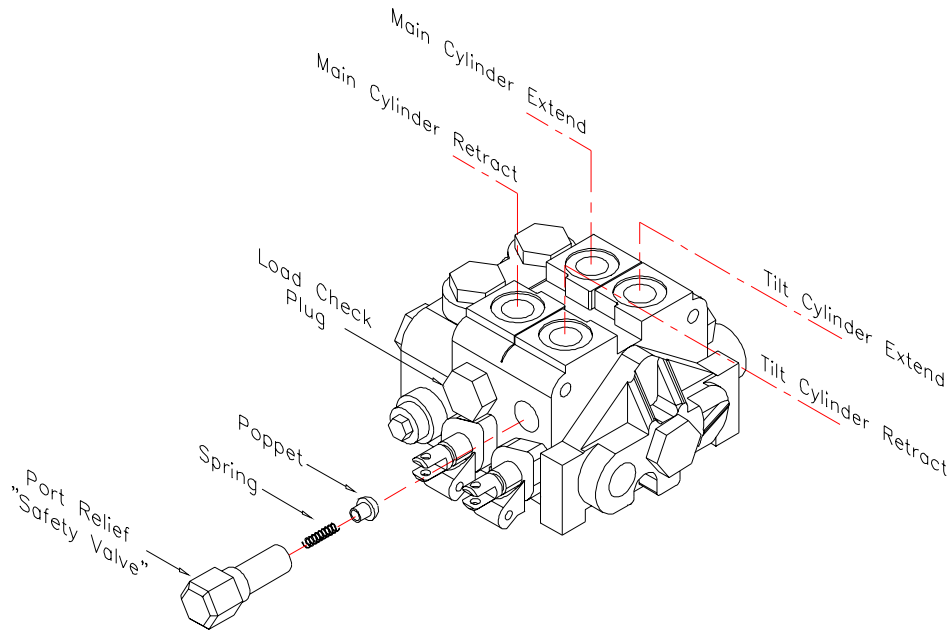


**Valve stack for standard installation**

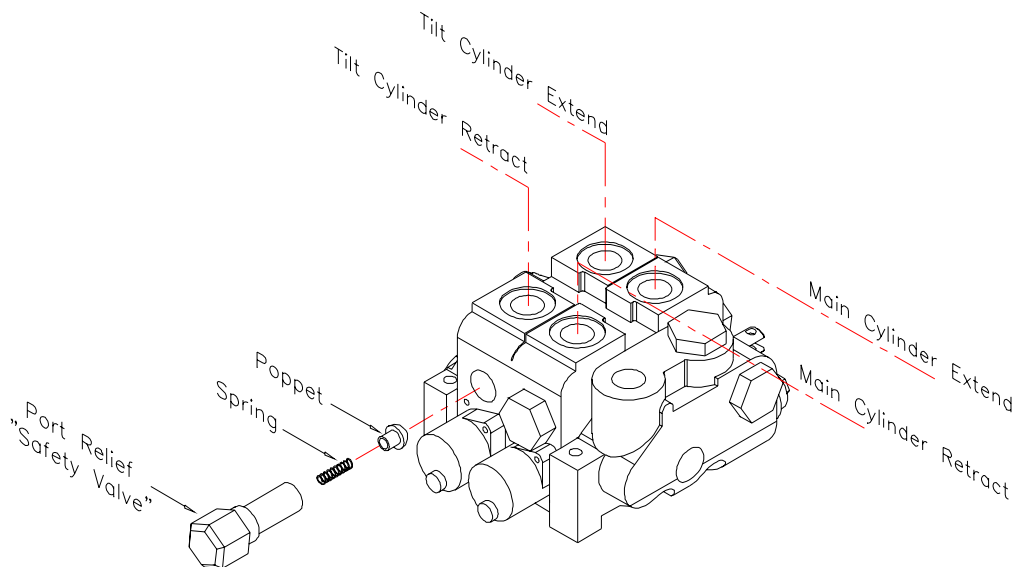

**Valve stack for non-standard installation**



# Rotary Valve Installation

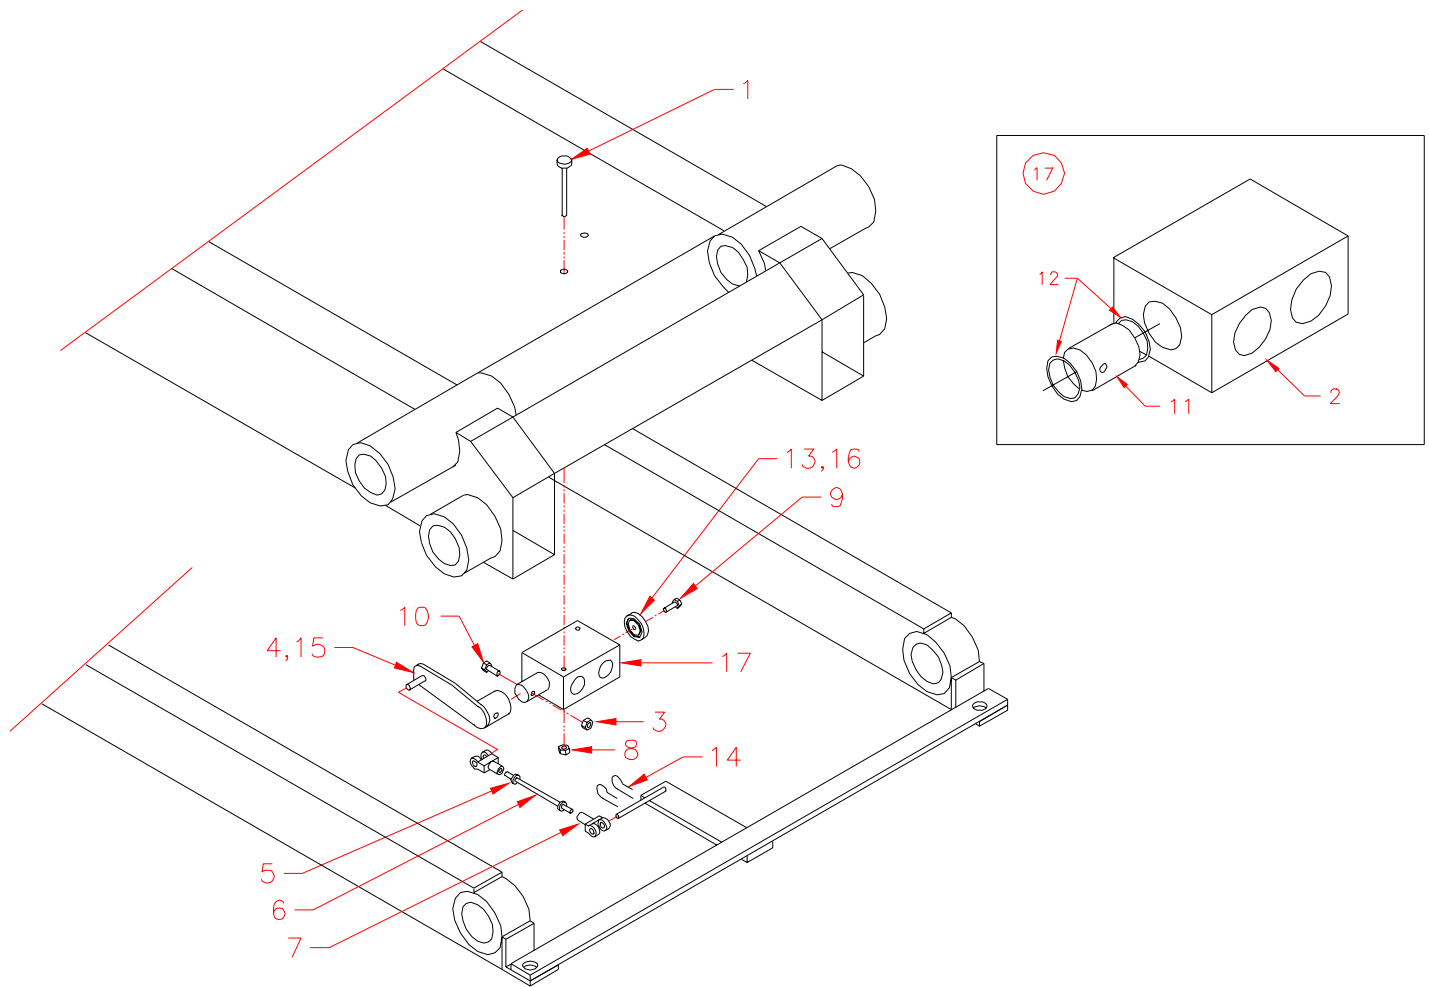

| ITEM | P/N  | DESCRIPTION               | QTY | ITEM | P/N   | DESCRIPTION             | QTY |
|------|------|---------------------------|-----|------|-------|-------------------------|-----|
| 1    | 0482 | Cap Screw, 0.25-20x3.00   | 2   | 10   | 0353  | Cap Screw, 0.38-16x2.00 | 1   |
| *2   | 0933 | Body, Rotary Valve        | 1   | *11  | D0270 | Spool, Rotary Valve     | 1   |
| 3    | 0347 | Nut, 0.38-16 Nyloc        | 1   | *12  | 0979  | Seal, U-Cup             | 2   |
| 4    | 1521 | Rod, Rotary Valve         | 1   | 13   | 3748  | Washer, Rotary Valve    | 1   |
| 5    | 2478 | Nut, 0.31-24              | 2   | 14   | C6113 | Cotter, 0.094x1.00      | 2   |
| 6    | 2476 | Rod, 0.31-24 Threaded GR7 | 12" | 15   | 0977  | O'Ring, 1.00x1.25x0.12  | 1   |
| 7    | 2479 | Clevis, 0.31 Pin          | 2   | 16   | D1638 | O'Ring, 1.12x1.38x0.12  | 1   |
| 8    | 0333 | Nut, 0.25-20 Nyloc        | 2   | 17   | 0877  | Rotary Valve Assembly   | 1   |
| 9    | 0480 | Cap Screw, 0.25-20x1.00   | 1   |      |       |                         |     |


\* Items are part of #17(0877- Rotary Valve Assembly)

## 7 Gallon Tank Assembly

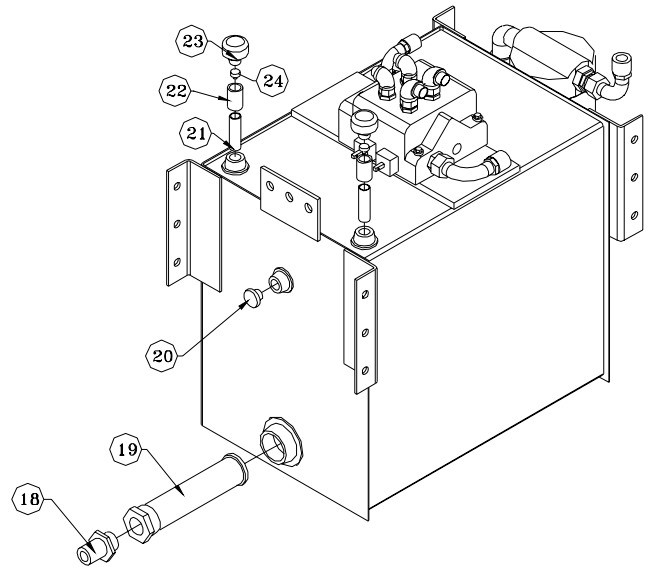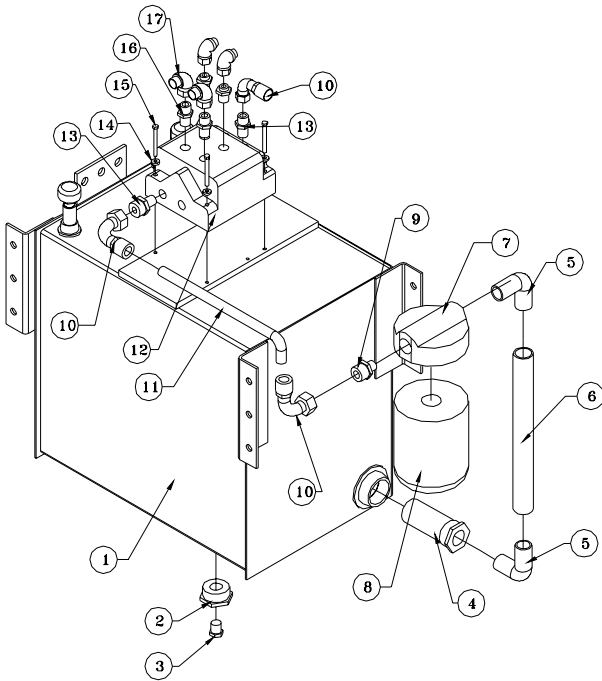


| ITEM | P/N   | DESCRIPTION                 | QTY | ITEM | P/N   | DESCRIPTION                | QTY |
|------|-------|-----------------------------|-----|------|-------|----------------------------|-----|
| 1    | 3503  | Tank 7 Gal                  | 1   | 13   | C1180 | Fitg, Adapter 8-12 F5OLO-S | 2   |
| 2    | C4825 | Fitg, Bush Blk 2.50x.75     | 1   | 14   | 0521  | Washer, .25 Lock           | 3   |
| 3    | C2126 | Plug, Magnet .75            | 1   | 15   | 0339  | Cap Screw., .25-20x2.50    | 3   |
| 4    | C6326 | Diffuser, 5-17 Gal          | 1   | 16   | C1855 | Fitg, Adapter 6-10 F5OLO-S | 4   |
| 5    | C2242 | St. Elbow .75x90° Blk       | 2   | 17   | C2248 | Fitg, Adapter 6-C6LO-S     | 4   |
| 6    | C1054 | Nipple, .75x6.00 Blk        | 1   | 18   | 1563  | Nipple, Barb 0588-20-20    | 1   |
| 7    | C6226 | Filter Head ZAF-07-25-1     | 1   | 19   | C5552 | Filter, Strainer TF-1220-0 | 1   |
| 8    | C6227 | Filter Long, AE-10          | 1   | 20   | C4955 | Sight Gauge, .75 Npt Eye   | 1   |
| 9    | C6014 | Fitg, Adapter 8-12 FLO-S    | 1   | 21   | C1053 | Nipple, .75x2.50 Blk Pipe  | 2   |
| 10   | 1559  | Fitg, Seal Lok 90 1J943-8-8 | 2   | 22   | C5930 | Coupler, .75 Blk           | 2   |
| 11   | C2773 | Hose, Hyd .50 381-8         | 18" | 23   | C2151 | Cap, Filler Breather       | 2   |
| 12   | C4944 | Valve Bank, V-20            | 1   | 24   | C4282 | Muffer, Load Genie         | 2   |


# Hydraulic Assembly

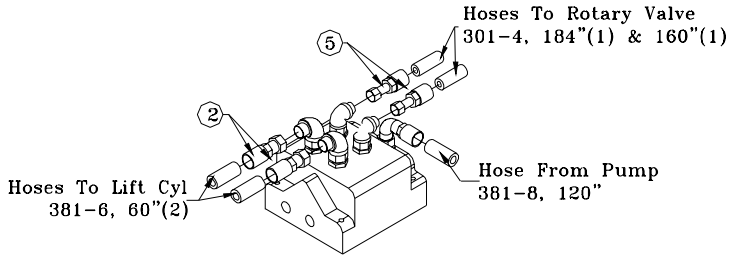


**Valve Bank**

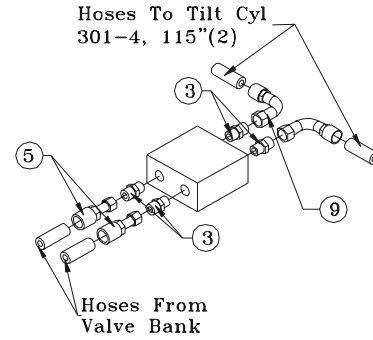


**Rotary Valve**




**Lift Cylinder**

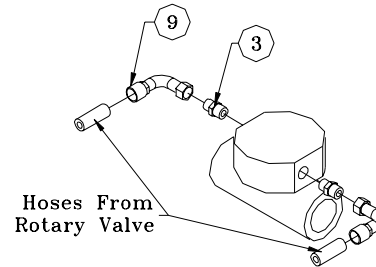

**Tilt Cylinder**

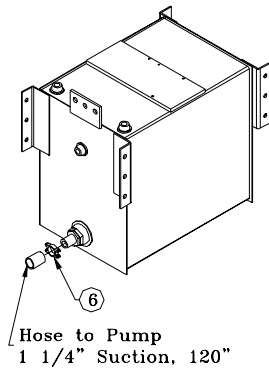

**Suction Line**

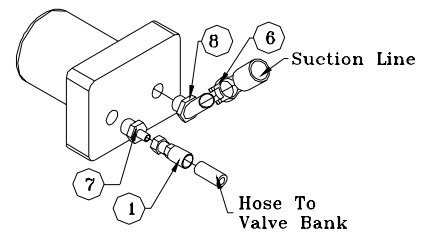

**Standard Pump**

| ITEM | P/N   | DESCRIPTION         | QTY | ITEM | P/N   | DESCRIPTION           | QTY |
|------|-------|---------------------|-----|------|-------|-----------------------|-----|
| 1    | 1558  | Hose Ftg, 1JS43 8-8 | 1   | 6    | C1123 | Hose Clamp, 88 DB-20  | 2   |
| 2    | C0545 | Hose Ftg, 1JS43 6-6 | 2   | 7    | D0549 | Adapter, 16-8 F5OG5-S | 1   |
| 3    | 0279  | Adapter, 6-F5OLO-S  | 8   | 8    | C4747 | Ftg, 4603-20-16       | 1   |
| 4    | C0546 | Hose Ftg, 1J943 6-6 | 2   | 9    | C0277 | Ftg, 1J943-6-4        | 4   |
| 5    | C0278 | Ftg, 1JS43-6-4      | 4   |      |       |                       |     |

## Controller Assembly




### Controllers



### Valve Bank

| ITEM | P/N  | DESCRIPTION             | QTY | ITEM | P/N  | DESCRIPTION           | QTY |
|------|------|-------------------------|-----|------|------|-----------------------|-----|
| 1    | 2103 | Bracket Controller      | 1   | 8    | 0343 | Washer, 0.31 Flat     | 8   |
| 2    | 0608 | Control Lever           | 2   | 9    | 0342 | Nut, 0.31-18 Nyloc    | 4   |
| 3    | 0663 | Bracket, Decal          | 1   | 10   | 0607 | Controller Cable      | 2   |
| 4    | 0333 | Nut, 0.25-20 Nyloc      | 2   | 11   | 0651 | Decal, Operation      | 1   |
| 5    | 0340 | Washer, 0.25 Flat       | 4   | 12   | 1056 | Nut, 0.25 Fine Thread | 2   |
| 6    | 0528 | Cap Screw, 0.25-20x4.50 | 2   | 13   | 0662 | Cable Ends, 0.25      | 2   |
| 7    | 0486 | Cap Screw, 0.31-18x1.50 | 4   |      |      |                       |     |

# Mounting Kit, 7 Gallon Tank

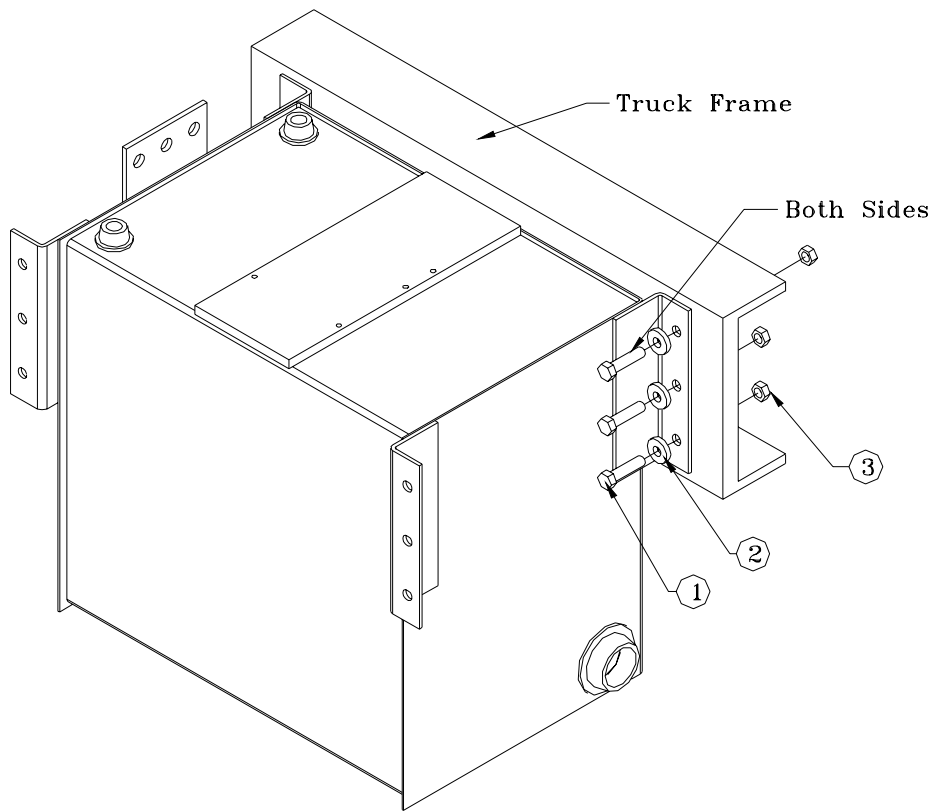

| ITEM | P/N  | DESCRIPTION             | QTY |
|------|------|-------------------------|-----|
| 1    | 0501 | Cap Screw, 0.50-13x2.00 | 6   |
| 2    | 0352 | Washer, 0.50 Flat       | 6   |
| 3    | 0360 | Nut, 0.50-13 Nyloc      | 6   |

## Miscellaneous Parts

| P/N   | DESCRIPTION   | QTY |
|-------|---------------|-----|
| D0045 | Alarm, Backup | 1   |





### Limited Warranty Statement

Stellar Industries, Inc. (Stellar) warrants products designed and manufactured by Stellar to be free from defects in material and workmanship under proper use and maintenance. Products must be installed and operated in accordance with Stellar's written instructions and capacities. The warranty period shall cover the following:

Twelve (12) month warranty on parts from the date recorded by Stellar as the in-service date, not to extend beyond twenty-four (24) months from date of manufacture,

Twelve (12) month repair labor from the date recorded by Stellar as the in-service date, not to extend beyond twenty-four (24) month from date of manufacture, and

Thirty-six (36) month warranty on all Stellar Crane and Hooklift structural parts from the date recorded by Stellar as the in-service date, not to extend beyond forty-eight (48) months from date of manufacture.

The in-service date will be derived from the completed warranty registration card. In the event a warranty registration card is not received by Stellar, the factory ship date will be used.

Stellar's obligation under this warranty is limited to, and the sole remedy for any such defect shall be, the repair and/or replacement (at Stellar's option) of the unaltered part and/or component in question. Stellar after-sales service personnel must be notified by telephone, fax, or letter of any warranty-applicable damage within fourteen (14) days of its occurrence. If at all possible, Stellar will ship the replacement part within 24-hours of notification by the most economical, yet expedient, means possible. Expedited freight delivery will be at the expense of the owner.

Warranty claims must be submitted and shall be processed in accordance with Stellar's established warranty claim procedure. Stellar after-sales service personnel must be contacted prior to any warranty claim. A return materials authorization (RMA) account number must be issued to the claiming party prior to the return of any warranty parts. Parts returned without prior authorization will not be recognized for warranty consideration. All damaged parts must be returned to Stellar freight prepaid; freight collect returns will be refused. Freight reimbursement of returned parts will be considered as part of the warranty claim.

Warranty service will be performed by any Stellar new equipment distributor, or by any Stellar-recognized service center authorized to service the type of product involved, or by the Stellar factory in the event of a direct sale. At the time of requesting warranty service, the owner must present evidence of date of delivery of the product. The owner shall be obligated to pay for any overtime labor requested of the servicing company by the owner, any field service call charges, and any towing and/or transportation charges associated with moving the equipment to the designated repair/service provider.

All obligations of Stellar and its authorized dealers and service providers shall be voided if someone other than an authorized Stellar dealer provides other than routine maintenance service without prior written approval from Stellar. In the case repair work is performed on a Stellar-manufactured product, original Stellar parts must be used to keep the warranty in force. The warranty may also be voided if the product is modified or altered in any way not approved, in writing, by Stellar.

The owner/operator is responsible for furnishing proof of the date of original purchase of the Stellar product in question. Warranty registration is the ultimate responsibility of the owner and may be accomplished by the completion and return of the Stellar product registration card provided with the product. If the owner is not sure of registration, he is encouraged to contact Stellar at the address below to confirm registration of the product in question. This warranty covers only defective material and workmanship. It does not cover depreciation or damage caused by normal wear and tear, accident, mishap, untrained operators, or improper or unintended use. The owner has the obligation of performing routine care and maintenance duties as stated in Stellar's written instructions, recommendations, and specifications. Any damage resulting from owner/operator failure to perform such duties shall void the coverage of this warranty. The owner will pay the cost of labor and supplies associated with routine maintenance.

The only remedies the owner has in connection with the breach or performance of any warranty on the Stellar product specified are those set above. In no event will Stellar, the Stellar distributor/dealer, or any company affiliated with Stellar be liable for business interruptions, costs of delay, or for any special, indirect, incidental, or consequential costs or damages. Such costs may include, but are not limited to, loss of time, loss of revenue, loss of use, wages, salaries, commissions, lodging, meals, towing, hydraulic fluid, or any other incidental cost.

All products purchased by Stellar from outside vendors shall be covered by the warranty offered by that respective manufacturer only. Stellar does not participate in, or obligate itself to, any such warranty.

Stellar reserves the right to make changes in design or improvement upon its products without imposing upon itself the same upon its products theretofore manufactured.

This warranty will apply to all Stellar Hooklifts, Stellar Service Trucks, & Truck-mounted Cranes shipped from Stellar's factory after July 1, 2005. The warranty is for the use of the original owner only and is not transferable without prior written permission from Stellar.

THIS WARRANTY IS EXPRESSLY IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. REMEDIES UNDER THIS WARRANTY ARE LIMITED TO THE PROVISION OF MATERIAL AND SERVICES, AS SPECIFIED HEREIN. STELLAR INDUSTRIES, INC. IS NOT RESPONSIBLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Revision Date: February 2007

Document Number: 37040